



**WALL
TILES**



Introducing **FLEXIFELT**

LINEA **FLEXIFELT** WALL TILES combine aesthetic appeal with outstanding acoustic performance, boasting a smooth, fabric-like finish. Crafted from PET (Polyethylene Terephthalate) material, this substrate is semi-rigid, lightweight, impact-resistant, and tackable, while maintaining exceptional acoustical properties suitable for both wall and ceiling applications.

FLEXIFELT is composed of 100% non-woven polyester fiber. Remarkably, at least 60% of this material is derived from post-consumer content, specifically recycled plastic beverage containers, rendering the panel 100% recyclable.

In addition to its eco-friendly composition, the **FLEXIFELT** material exhibits non-hygroscopic qualities, making it resistant to moisture absorption. It is also characterized as anti-microbial, anti-fungal, and free from volatile organic compounds (VOCs) such as formaldehyde. Available in a diverse range of colors, thicknesses, and applications.



 WALL TILES

**Product information is subject to change without notice.*




| FLEXIFELT PRODUCT SPECIFICATIONS | |
|----------------------------------|--|
| Acoustic Felt Type: | 100% Polyester Fiber (60% PET–Recycled Fiber, 40% PET Virgin Fiber) |
| Fire rating: | Class A (ASTM E84)USA and CAN/ULC S102 |
| Size: | 1225mm x 2800mm (4' x 9' Nom)—Thickness 9mm and 12mm 1200mm x 2440mm (4' x 8' Nom)—Thickness 24mm |
| Edge: | Square or Beveled at 15°, 22.5°, 30° and 45° |
| Colours: | 31 |
| NRC Rating: | 0.40–1.00 (depending panel thickness and mounting options) |
| Weight: | 9mm (3/8")–1900g/m ² –0.39lb/ft ² 12mm (1/2")–2300g/m ² (0.47 lb/ft ²) 24mm (1")–3500g/m ² (0.72lb/ft ²) |
| Use: | Interior use only |

| FLEXIFELT SOLID PANEL NRC | | | | | |
|---|-------------|----------------|-------------|----------------|-------------|
| 9mm Thickness | | 12mm Thickness | | 24mm Thickness | |
| Frequency/Hz | NRC | Frequency/Hz | NRC | Frequency/Hz | NRC |
| No cavity | 0.35 | No cavity | 0.40 | No cavity | 0.60 |
| | | Cavity 25mm | 0.65 | | |
| Cavity 50mm | 0.65 | Cavity 50mm | 0.75 | Cavity 50mm | 0.75 |
| Cavity 100mm | 0.75 | Cavity 100mm | 0.80 | Cavity 100mm | 0.85 |
| Cavity 150mm | 0.80 | Cavity 150mm | 0.90 | Cavity 150mm | 0.90 |
| Cavity 200mm | 0.80 | Cavity 200mm | 0.90 | | |
| Note: NRC values illustrated are the average sound absorption coefficient from frequency 100 to 4000 Hz | | | | | |
| <p>Handling and Storage: FLEXIFELT possesses a semi-rigid structure, requiring careful handling and storage to prevent damage to the product. To ensure the integrity of the material, it is recommended to handle packaging and panels with care, carrying them vertically upright with the assistance of two tradespeople. For optimal preservation, panels should be stored indoors in a clean, dry, cool, and well ventilated environment, ensuring they are kept elevated above the floor or any surface emitting moisture. It is advisable to wear clean gloves during the handling process to prevent any soiling or marking of the product. Caution should be exercised to avoid bending or flexing the panels, as this may result in creasing. To further safeguard the material, it is important to steer clear of exposure to temperatures exceeding 150°F (65°C). Additionally, panels should not be stored in proximity to radiators, steam pipes, or direct sunlight, mitigating the risk of heat-related damage.</p> <p>Maintenance: Maintain regular cleaning by using a smooth attachment with low suction for vacuuming. We recommend seeking professional cleaning services periodically. Only use upholstery detergent; refrain from using dish washing or laundry detergents. Prior to reuse, ensure thorough drying away from direct heat.</p> <p>Warranty: Linea Ceiling and Wall Systems offers a two (2) year limited warranty effective from the date of installation, protecting against undue deterioration specifically attributable to faulty materials and manufacturing workmanship.</p> | | | | | |


TILE DESIGNS

OPTIONS:


1. Square Edge
2. Beveled Edge—15°, 22.5°, 30° and 45°

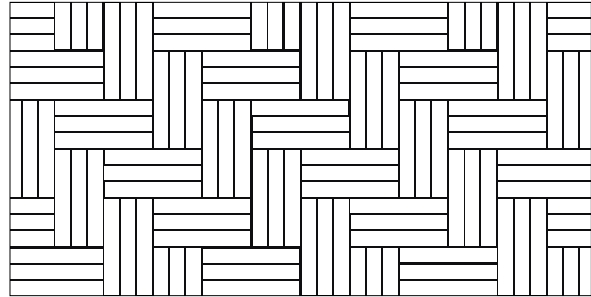


Form Fusion

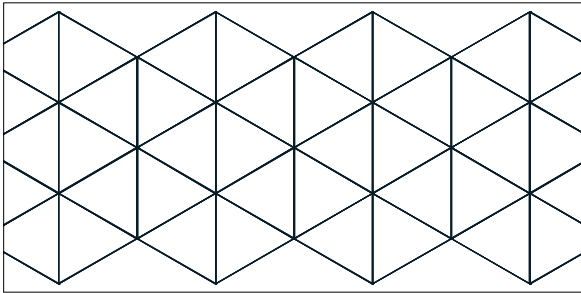


Spatial Delight

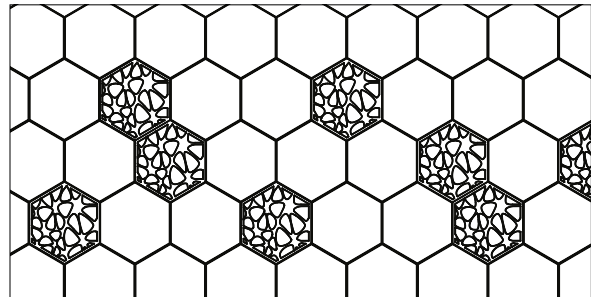


Urban Escape

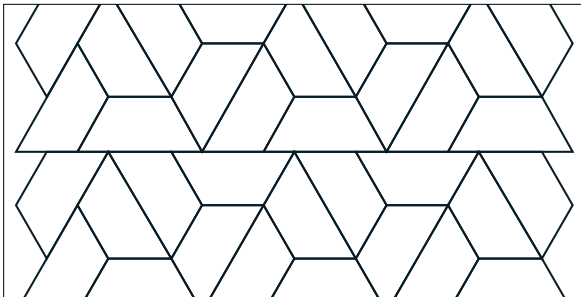


Architectural Odyssey

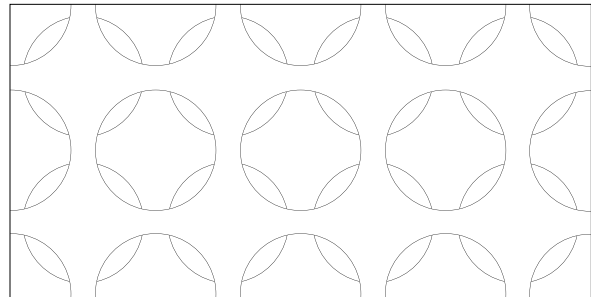

Whimsical

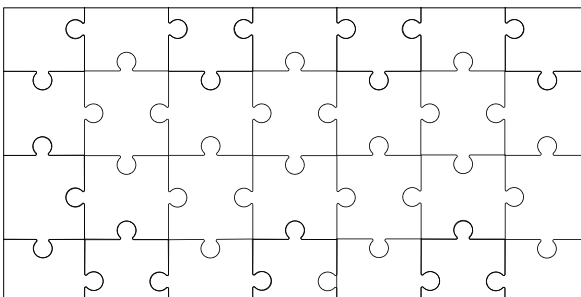

Puzzled

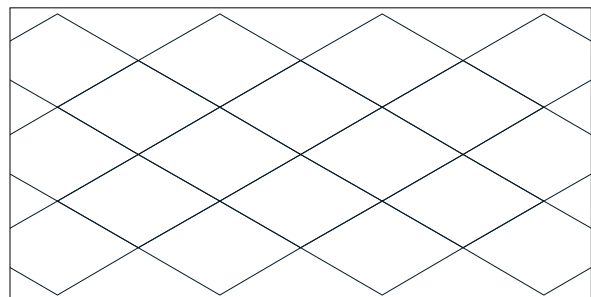










Minimalist























COLORS



POPULAR COLORS

| | | | | | | | | |
|---|---|---|---|---|--|---|---|---|
|  |  |  |  |  |  |  |  |  |
| BLACK | CHARCOAL | WHITE | LIGHT GRAY | MARBLE | SNOW | CEMENT | BEIGE | SAND |
| 9mm 12mm 24mm | 9mm 12mm 24mm | 9mm 12mm | 9mm 12mm 24mm | 9mm 12mm 24mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm |

OTHER COLORS

| | | | | | | | | |
|---|---|---|---|---|--|---|---|---|
|  |  |  |  |  |  |  |  |  |
| DARK GRAY | ICY | RED | ORANGE | YELLOW | GREEN | NAVY | BLUE | DENIM |
| 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm |
|  |  |  |  |  |  |  |  |  |
| DUSK | TURQUOISE | STORM | ECLIPSE | RIVER ROCK | DOLPHIN | JADE GRAY | GRANITE | TWEED |
| 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm |
|  |  |  |  | | | | | |
| PLATINUM | SMOKE | STONE | PEWTER | | | | | |
| 9mm 12mm | 9mm 12mm | 9mm 12mm | 9mm 12mm | | | | | |

DISCLAIMER:


Slight variation in thickness, fiber mix and color as well as flecks and other slight surface blemishes are an inherent feature of this material and are unavoidable.

Custom colors are available and are subject to minimum order quantities.


Contact LINEA for details

**Product information is subject to change without notice.*

ATTACHMENT METHODS

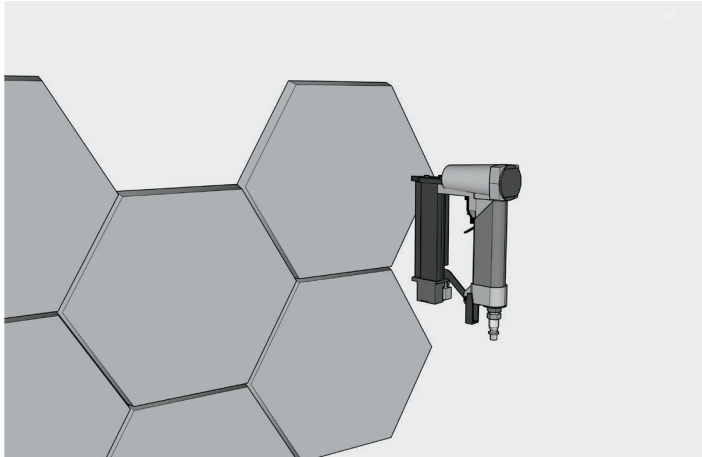

Pin Nailer—Direct Mount
Direct mount is the recommended installation method.

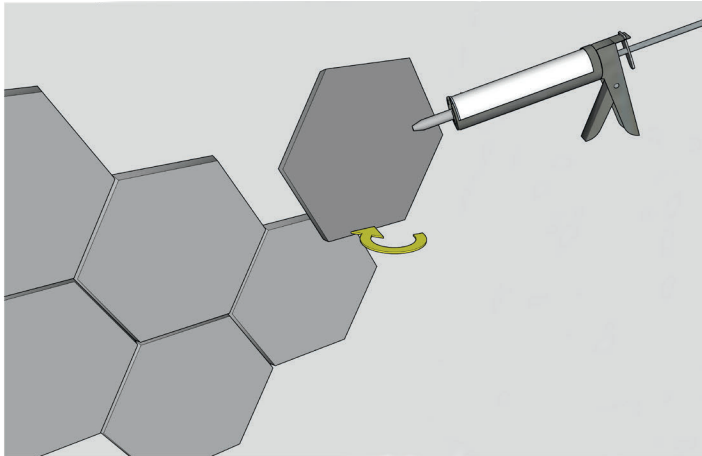

Construction Adhesive*

NOTE:

*Construction Adhesive

Before applying adhesive: Refer to project specifications / conditions and confirm with the adhesive manufacturer for compatibility.

Linea **FLEXIFELT** panels can be adhered to walls using adhesive.

Recommended adhesives to use with our **FLEXIFELT** panels include:

- Loctite PowerGrab Construction Adhesive
- Loctite PL 3X Premium Construction Adhesive
- Liquid Nails LN903 Heavy-Duty Construction Adhesive
- AFM Safecoat Almighty Adhesive (solvent free)
- ChemLink BuildSecure Construction Adhesive (solvent free).

Do not use PVA Glue as adhesive for FLEXIFELT panels.